

XYZ PROTURN RLX 355

SPINDLE 5.75 kW / (7.5 HP)
SWING OVER BED 360 mm
SPINDLE BORE 52 mm
DISTANCE BETWEEN CENTRES 1,000 mm
MAX 4,000 RPM




	XYZ RLX 355
Swing over bed	360 mm
Swing in gap	<i>not applicable</i>
Gap in front of faceplate	<i>not applicable</i>
Swing over cross slide	225 mm
Cross slide travel	185 mm
Distance between centres	1,000 mm
Maximum cutting length	900 mm
Spindle bore	52 mm
Spindle nose	D 1-6 camlock
Spindle taper	MT4 in bush
Spindle motor	5.75 kW / (7.5 HP)
Spindle speeds	50-4,000 rpm (2 ranges)
Tailstock travel	150 mm
Tailstock taper	MT 4
Tailstock diameter	60 mm
Bed width	300 mm
Footprint L x D x H	2,300 x 1,370 x 1,810 mm
Weight	1,955 kg

Standard Equipment

200 mm 3 Jaw Chuck.
Constant Surface Speed.
TRAKing®.
2 Range Headstock.
Quick Change Toolpost with 6 Holders.
Rapid Traverse with Joy Stick.
Air Assist Tailstock.
Interlocked Chuck Guard and Main Guard.
Auto Lubrication.
Flood Coolant.
Worklight.
Centres and Bushes.

Optional Equipment

Advanced Features.
Verify Solid Model Graphics.
DXF File Converter.
Offline Programming.
Drilling Attachment.
Adjustable Back Stop.
Faceplates, Steadies, Chucks and Collet Chucks.
4 or 8 Station Auto Indexing Toolpost.
Swarf Conveyor.

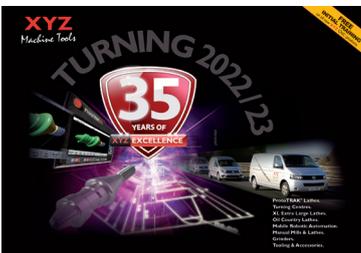

Part of the **XYZ Turning Catalogue** which includes:
ProtoTRAK® Lathes.
Turning Centres.
XL Extra Large Lathes.
Oil Country Lathes.
Mobile Robotic Automation.
Manual Mills & Lathes.
Grinders.
Tooling & Accessories.



Visit www.xyzmachinetools.com or the YouTube channel to see the video.